FAX_LAB
630

PLAIN PAPER INK-JET FAX

THE RELIABLE ANSWERPHONE
Answering machine with plenty of memory - 18 minutes - and ability to retain recorded messages even in a power outage.

HIGH PRODUCTIVITY
Document memory containing up to 50 pages and 100-number phonebook support the heaviest workloads.

ECO-FRIENDLY CARTRIDGES
Fax_Lab 630 uses a latest generation printing cartridge designed to be good for the environment and for human health.

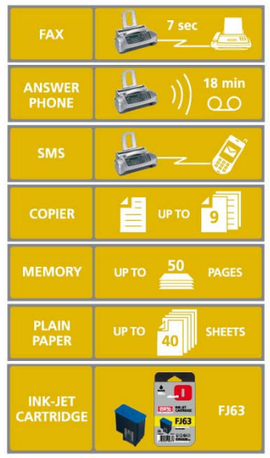

FAX_LAB
630

FAX	**Printing method**	Ink-jet on plain paper
	Compatibility	Group 3
	Transmission speed	7 seconds at 14,400 bps with Automatic Fall Back
	Compression method	MH, MR, MMR with Error Correction Mode (ECM)
	Document format	A4
	Automatic document feeder	10 pages
	Paper tray	40-sheets
	Memory (pages)	Up to 50 (Slerexe letter text sample, MH compression, 3,8% coverage)
	Scan resolution	200 x 200 dpi
	Contrast control	Manual
	Greyscale	64 levels
	One-touch/abbreviated dialling	10/90 numbers
	Functions	Broadcasting from memory to up to 10 numbers Substitute reception Automatic fax/telephone and answering machine/fax switching Silent reception
TELEPHONE	**Functions**	Hands-free dialling (with the handset lowered) Caller identification Conversation on hold Choice of 4 ringtones for incoming calls
	Answerphone	Up to 18-minute voice message recording time Configurable incoming messages lenght, from 30 to 60 sec. Unlimited retention of recorded messages Personal access code Remote access Message transfer to predefined number
SMS*	**Functions**	SMS writing (characters associated with numeric keypad) SMS transmission to fixed and mobile numbers and e-mail addresses Storage of up to 30 incoming SMS Printout of received SMS
COPIER	**Copying**	Single page
	Zoom	50%, 70%, 100%, 140%, 200%
	Multiple copies	Up to 9 copies
OTHER CHARACTERISTICS	**Display**	2 lines x 16 characters
	Consumption	4 W in stand-by, 25 W max.
	Consumable cartridge	Starter cartridge: included, free of charge User cartridge: FJ 63, code B0702, for single use only, capacity 450 pages (Slerexe letter text sample, MH compression, 3,8% coverage)
	Dimensions (LxWxH)	340 x 235 x 273 mm
	Weight	2,5 kg

*where service is provided by local operators.

www.olivetti.com

Performance rates refer to use in optimal conditions. With the right to change technical specifications.

26113-00